

AquaBlok® 2080FW™ /PONDSEAL™

General Description

AquaBlok is a patented composite aggregate resembling small stones that is typically comprised of a dense aggregate core wrapped with an additive layer. In this application of the technology, crushed limestone typically serves as the core and powdered sodium bentonite clay is utilized as the coating or additive layer (Figure 1).

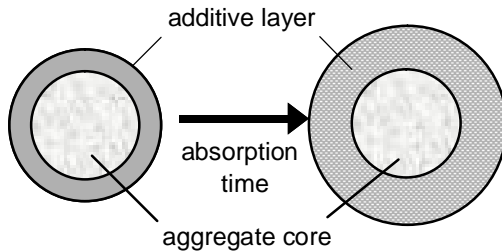


Figure 1. Configuration of stone-clay composite particle.

AquaBlok 2080FW (or PONDSEAL) is a freshwater-compatible formulation which is 20% clay by weight (based on the total quantity of raw material used in production). The high-solids content and consistency of the blend provides superior structural stability and reliable hydration/swell when exposed to water. This product will provide a low-permeable seal without the need for field blending or mechanical compaction.



Product Specifications

Aggregate Core:	Nominal AASHTO #8 (1/4-3/8") crushed limestone or non-calcareous substitute, as deemed project-appropriate (can be custom-sized to meet project-specific need)
Additive Layer	Bentonite Performance Minerals – BARA-KADE® Standard (or equivalent) <ul style="list-style-type: none"> ◦ High-swell Wyoming sodium (Na) bentonite clay (montmorillonite) Powdered (approx. 200 mesh); light grey; odorless
Binder:	Cellulosic polymer
Permeability:	1×10^{-7} to 1×10^{-9} cm/sec (depending on product thickness and overburden)
Dry Bulk Density:	88 – 90 lbs/ft ³ (consolidated); 83 – 85 lbs/ft ³ (loose)
Pre-Hydrated Moisture:	7 – 15% (maximum)

Product Storage & Handling

AquaBlok should always be stored under-roof or completely protected (i.e. tarped) from exposure to surface moisture (e.g. precipitation, run-off, excessive condensation) prior to placement. Storage in a temperature- and/or humidity-controlled environment is not necessary. However, always store in original packaging on a clean, dry pallet prior to installation.

Material can be placed using a wide range of commonly available construction equipment – e.g. loaders, excavators, conveyors. Care should be taken to keep equipment as dry as possible during handling. For optimum performance, AquaBlok should NOT be blended or mixed with resident soil. Mechanical compaction can further reduce permeability but is not necessary.



AquaBlok, Ltd.
 3401 Glendale Ave. Suite 300
 Toledo, Ohio 43614 U.S.A.
www.aquablok.com
 Phone: (800) 688-2649
 Email: services@aquablokinfo.com
 © 2012 AquaBlok, Ltd. All rights reserved.
 Rev. 01/02/12

Distributed by: Cascade Geosynthetics
 3610 N. Suttle Road, Bldg B Portland, OR 97217
 Phone: (971) 339-1020, www.cascadegeos.com