



 **PLATIPUS**  
EARTH ANCHORING SYSTEMS

 **Cascade**  
GEOSYNTHETICS

# Civil Engineering & Construction

Brochure



# INTRODUCTION

Platipus® Anchors Inc are market leaders in the design, manufacture and supply of mechanical earth anchoring products in the USA. We are renowned for providing some of the most innovative and cost effective anchoring solutions for the Civil Engineering and Construction industries.




The percussion driven mechanical anchor is a unique, modern and versatile device that can be rapidly deployed in most displaceable ground conditions. It offers a lightweight corrosion resistant anchor that can be driven from ground level using conventional portable equipment. It creates minimal disturbance of the soil during installation, can be stressed to an exact holding capacity and made fully operational immediately. As a completely dry system it also has minimal environmental impact.



## Applications

- Retaining Walls
- Slope Stabilization
- Bridges
- Sheet Piling
- Erosion Control
- Gabion Support
- Rock Retention
- Buoyancy Control/Pipelines
- Drainage
- Guyed Structures
- Scaffolding
- Foundations
- Landfill Capping
- Portable Buildings/Structures
- General Security
- Marine Applications
- Tunnel Linings
- Temporary Works

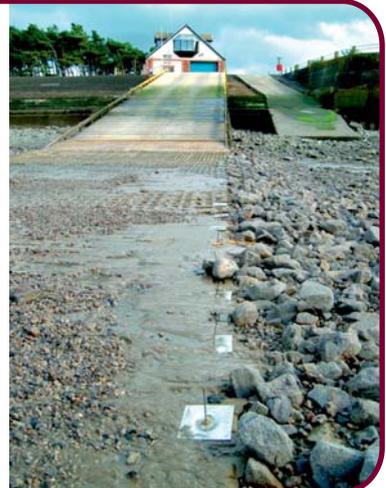



## FEATURES & BENEFITS

### KEY BENEFITS OF THE PLATIPUS® EARTH ANCHORING SYSTEM

- Simple and effective concept
- Lightweight corrosion resistant products to suit a range of design life requirements
- Fast and easy installation
- Immediate quantifiable loads
- Holding capacity up to 44,000lbs
- Ideal for temporary and permanent situations
- Cost effective alternative to traditional anchoring techniques



### ENVIRONMENTAL BENEFITS

- No grout
  - No curing time
  - No mess
  - No contamination
- Low environmental impact
- Can be made suitable for Conservation & Wetlands Construction



### ADDITIONAL SERVICES & PRODUCTS




- Technical assistance and conceptual proposals
- On-site training and demonstration
- Platipus® Anchored Reinforced Grid Solutions(ARGS®)
  - a low impact solution for surface erosion and shallow seated slide failures
- Anchor specification software and additional information is available online
- Plati-Drain® - a unique solution to reduce pore water pressure within clay slopes and from behind retaining walls
- Technical presentations
- Site surveys and anchor testing
- Supply and installation service through a network of Approved Installers
- Large choice of rental equipment to install and proof test the system
- Latest information accessible to download from our website [www.platipus.us](http://www.platipus.us)





## HOW A MECHANICAL ANCHOR WORKS


There are three steps to the installation of an anchor system:

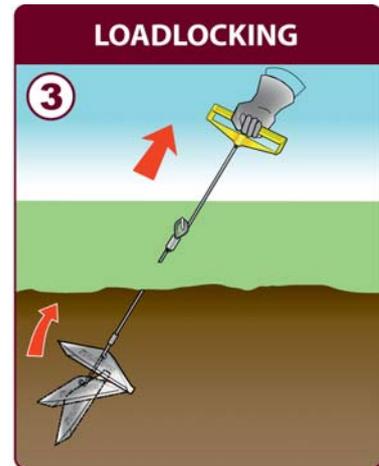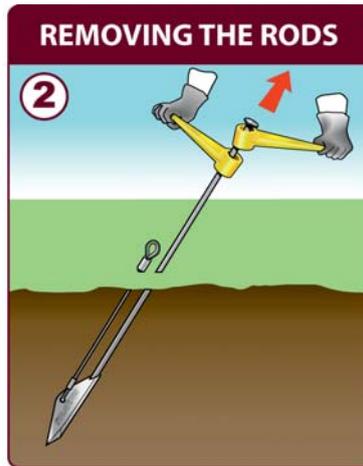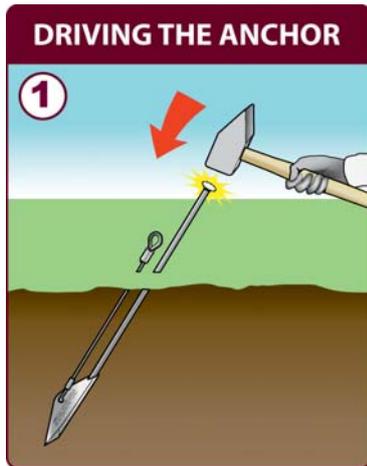

The same three basic steps apply to the installation of all anchor systems, from the smallest S2 to the largest B10.




## STRESS DISTRIBUTION & BEARING CAPACITY

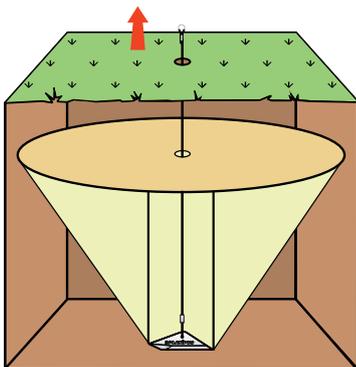

**Granular Soil**

(Based on Terzaghi's calculation)

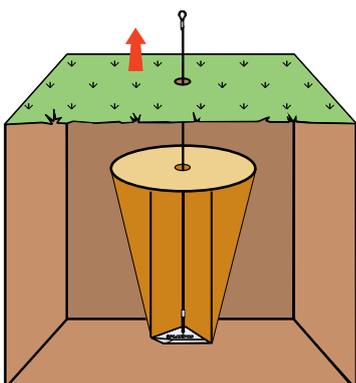

**Soft Cohesive Soil**

(Based on Skempton's calculation)

The stress distribution in front of a loaded anchor can be modelled using foundation theory. The ultimate performance of an anchor within the soil is defined by the load at which the stress concentration immediately in front of the anchor exceeds the bearing capacity of the soil.

Factors that will affect the ultimate performance of the anchor include:-


- Shear angle of the soil
- Size of the anchor
- Depth of installation

Platipus® anchors perform exceptionally well in a granular soil, displaying short loadlock and extension characteristics, a broad frustum of soil immediately in front of the anchor and extremely high loads.

Stiff cohesive soils, such as boulder clays, can also give outstanding results. However, weaker cohesive soils, like soft alluvial clays, can result in long loadlock and extension distances and a small frustum of soil in front of the anchor. Consequently these conditions require a larger size of anchor and if possible a deeper driven depth to achieve design loads.



For further information please see the Anchor Load Indicator section on our website.

# TYPICAL ANCHOR BEHAVIOR

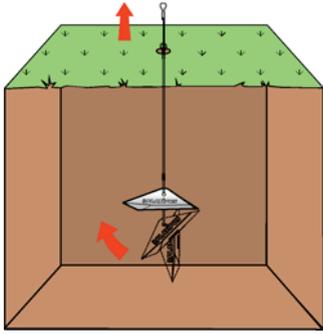



## LOADLOCK

The first stage is where a load is applied to rotate the anchor into its loadlocked position. Elements of both load and extension are present.

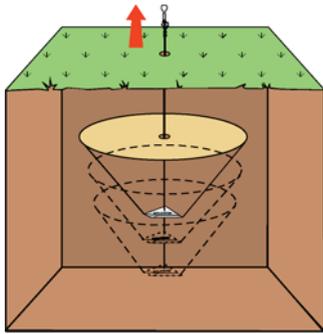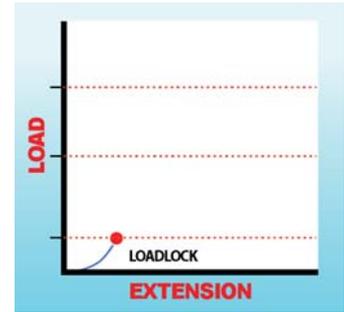



## COMPACTION AND LOAD

The second stage is where the anchor system is generating a frustum of soil immediately in front of the anchor. At this point load normally increases with minimum extension. The soil type will affect the overall extension.

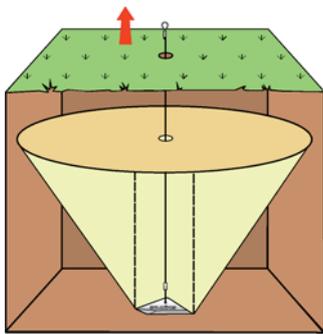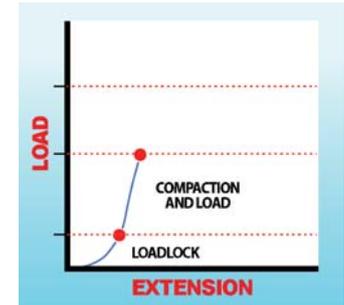


## MAXIMUM LOAD RANGE

The third stage is where the anchor produces its ultimate load. As the anchor load approaches the bearing capacity of the soil, the rate of increase in load will reduce until bearing capacity failure of the soil takes place.

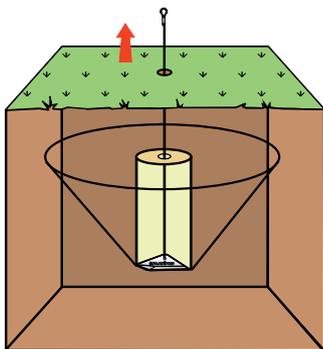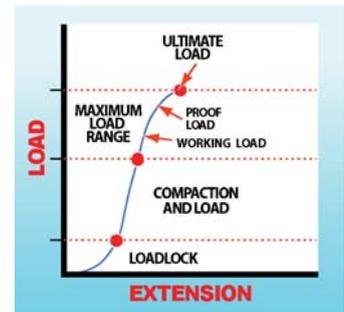


## BEARING CAPACITY FAILURE

Caution: If the mechanical shear strength of the soil is exceeded, the residual load will decrease with continued extension as the anchor shears through the ground.

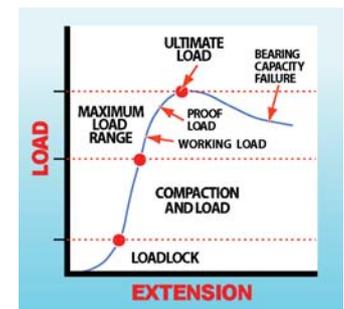

# ANCHOR COMPONENTS

There are five components that make up an anchor system:

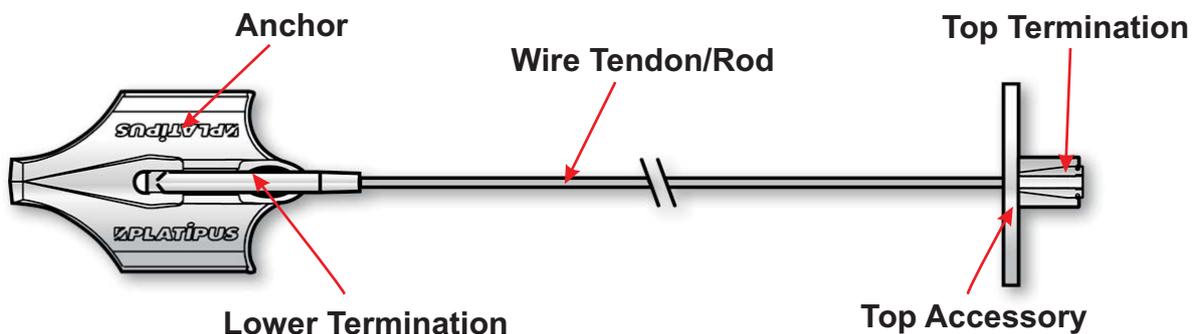



## STEALTH ANCHOR



The 'Stealth' anchor is designed to cover a wide range of lightweight anchoring. Its narrow profile means that it requires a single core hole to drive through a stone or masonry wall.

Its chisel drive point and streamline shape makes installation easy, in most cases, using simple hand or power tools. This also makes it an ideal choice when working in areas with restricted access.

Product Code	E=EYE VERSION	Dimensions L x W x H (inches)	Materials	Typical Load Range*	Typical Installed Depth
<b>S2</b>		3.14 x 1.10 x 0.98	Aluminum Alloy; Hard Anodised Aluminum Alloy	0 - 550 lbs	1.3' - 2'
<b>S4</b>		4.76 x 1.61 x 1.33	Aluminum Alloy; Hard Anodised Aluminum Alloy	220 - 2200 lbs	2' - 2.5'
<b>S6</b>		6.73 x 2.28 x 1.96	Aluminum Alloy; Hard Anodised Aluminum Alloy; Aluminum Bronze	1100 - 5500 lbs	2.6' - 4'
<b>S8</b>		10.35 x 3.54 x 2.99	Aluminum Alloy; Hard Anodised Aluminum Alloy; Galvanized Spheroidal Graphite Iron; Aluminum Bronze	2200 - 8800 lbs	3.6' - 5'

## BAT ANCHOR



The 'Bat' anchor is designed to achieve higher loads and also enhance anchoring in soft cohesive soils. Its ability to accept the T-Loc lower termination allows flexibility with regard to on-site anchor system assembly. It also means it can accept a wide range of wire tendons and solid rods.

Installation requires more powerful hand held hydraulic breakers or, in some cases, a wheeled or tracked excavator with a percussive breaker attachment.

Product Code	T=T-LOC VERSION	Dimensions L x W x H (inches)	Materials	Typical Load Range*	Typical Installed Depth
<b>B4</b>		12.2 x 4.3 x 3.7	Galvanized Spheroidal Graphite Iron; Aluminum Bronze	4500 - 13500 lbs	5' - 8'
<b>B6</b>		13.22 x 8.11 x 3.58	Galvanized Spheroidal Graphite Iron; Aluminum Bronze	6600 - 22000 lbs	6' - 10'
<b>B8</b>		16.65 x 10.19 x 4.13	Galvanized Spheroidal Graphite Iron; Aluminum Bronze	11000 - 33000 lbs	10' - 13'
<b>B10</b>		21.29 x 13.18 x 4.33	Galvanized Spheroidal Graphite Iron; Aluminum Bronze	16500 - 44000 lbs	13' - 16'

\*The typical load range of an anchor is dependant on the engineering properties of the soil.



## WIRE TENDONS & SOLID RODS



To suit most specifications and load requirements we can offer a wide selection of wire tendons and solid rods. Whether it is round strand wire tendon for applications requiring lower loads, the flexibility of wire tendons make it possible to work in areas where access and space is restricted.



We can also supply high yield solid rods which have a number of advantages over wire tendon. They can provide a higher ultimate load, sacrificial corrosion resistance and allow the depth of installation to be varied on-site.

Both wire tendons and rods are available in a range of sizes and materials to suit temporary (up to 5 year) through to permanent (120 year) design life.

## TOP FITTINGS

We can provide a wide range of top fittings to suit most applications and budgets.

A load bearing plate and wedge grip is a perfect low cost solution for installations that are perpendicular to an application. Tilt washers are also available for angled installations. If the finished appearance is of aesthetic importance we offer a near flush fitting load plate that accepts a recessed wedge grip and cap or an inverted pattress plate which includes a hemispherical washer to allow the angle of anchor installation to vary between 0°-30°.



Top fittings specifically designed for revetment blocks and reinforced geomesh are available. We can also provide a variety of soft and hard eye terminations to secure guyed structures and scaffolding.

Over the last 30 years we have developed a large choice of top fittings. If you have a specific requirement that is not covered by our standard range we can supply a custom made solution.



Some applications, such as historical structures, require all evidence of anchoring to be concealed. This can be achieved by recessing the anchor system top fittings within the structure. Once complete the facing brick or stonework can be replaced to provide an invisible repair.





# STRUCTURAL REINFORCEMENT


The Platipus® anchor system can also be used in conjunction with other structural reinforcement products to provide an extremely effective solution on masonry walls with limited structural integrity.



# DESIGN LIFE

All anchor system components are available in a range of materials to suit the design life.

The selection of the project materials should be carefully chosen taking our advice for each individual project. The life expectancy of the anchor / tendon is dependant upon the corrosivity of the soil in which it is placed.

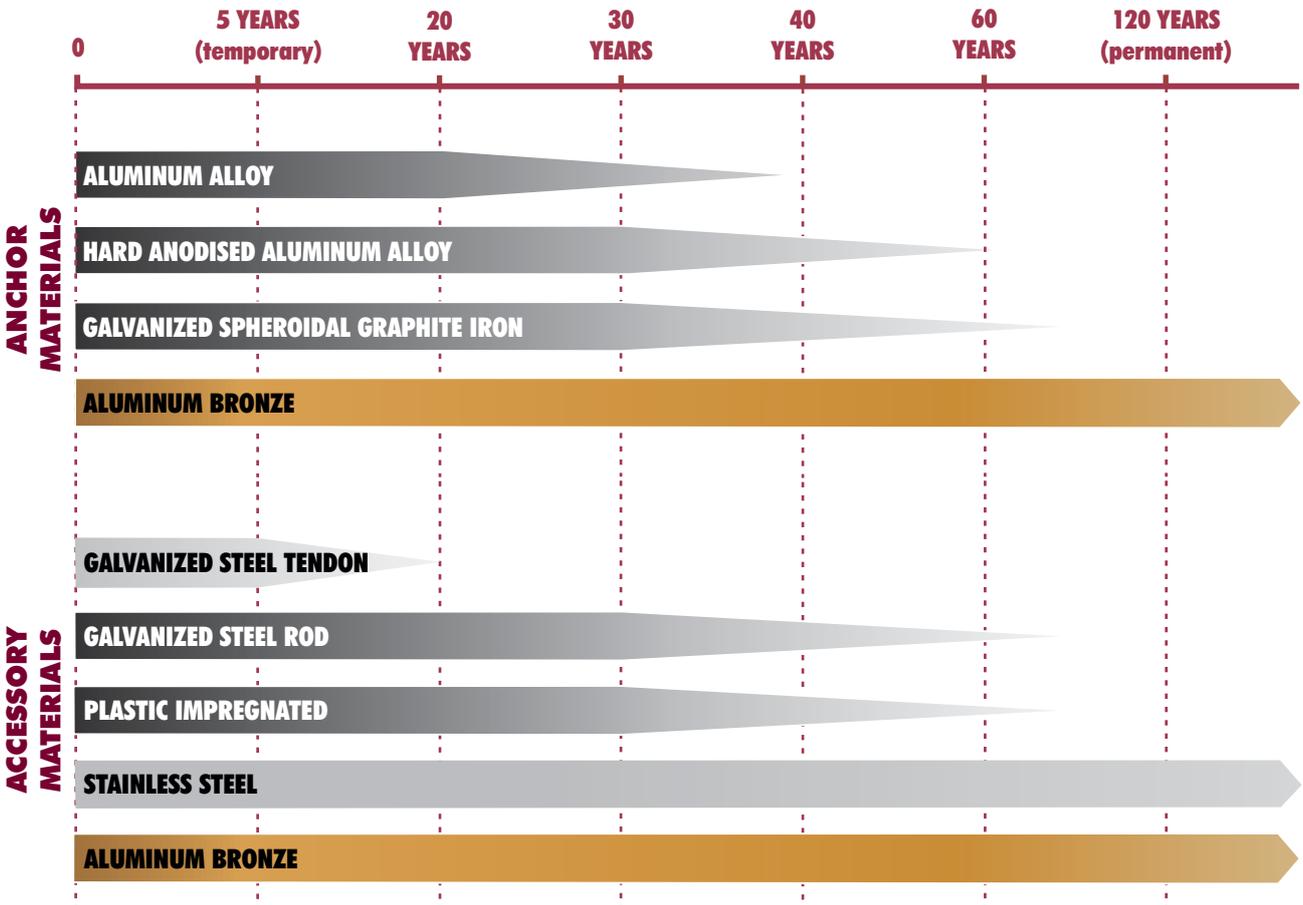



## OTHER PRODUCTS



Water saturation, due to heavy rainfall and insufficient drainage, leads to the softening of clay soils within slopes and increases hydraulic forces behind earth retaining structures.

Plati-Drain® is a unique solution that reduces pore water pressure within clay slopes and behind retaining walls. Unlike conventional weep holes Plati-Drain® provides deep penetration, this can be in excess of 33 feet. It can also help prevent shallow or deep seated slope failures.


Available as a 'Passive' or 'Active' solution. The 'Passive' system uses a sacrificial anchor head to drive the Plati-Drain® into its optimum position providing an immediate channel for water to drain. The 'Active' system has an additional wire tendon attached to the anchor which allows it to be loadlocked, providing simultaneous draining and restraining capability.



The Platipus® Anchored Reinforced Grid Solution (ARGS®) is a perfect low impact anchoring solution for surface erosion problems and shallow seated slide failures. These lightweight systems can be used with most geosynthetic products including erosion control matting, membranes, geogrids, reinforced mesh, high density polyethylene coverings and cellular confinement systems.

Our S2, S4 and S6 Percussive Driven Earth Anchors (PDEAs®) are particularly effective in situations where access is difficult, where scour protection is required for example flood prone areas, riverbanks and storm water channels. Benefits of the system include its speed and simplicity, in most cases requiring only hand held equipment for installation. The system provides immediate load bearing capability and when combined with geosynthetic products and an appropriate range of plant types it can retain the slopes surface integrity. Our solutions can incorporate products from all major manufacturers to provide the best complete solution.

Please refer to our Platipus Anchored Reinforced Grid Solutions Brochure for more information or alternatively download this brochure from our website at [www.platipus.us](http://www.platipus.us)

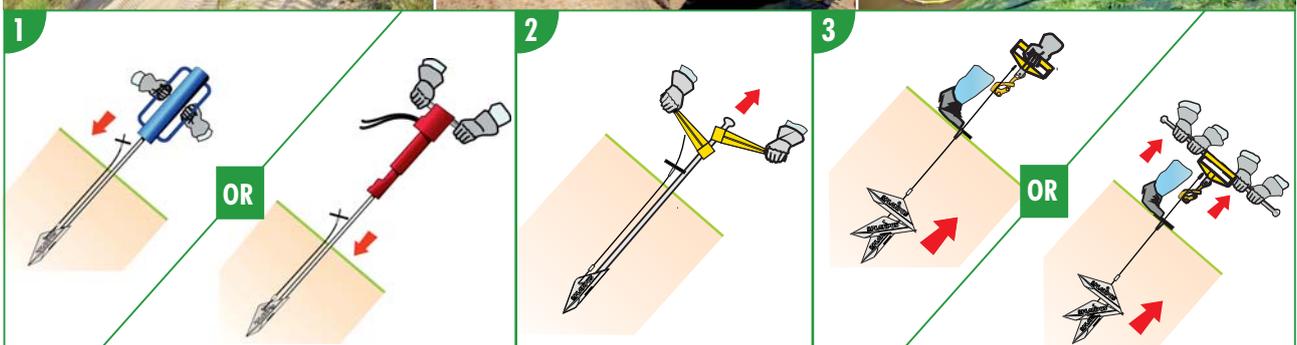



## SITE ANALYSIS & LOAD REPORT



With the correct soil information we are able to predict holding capacities of our earth anchors. In circumstances where soil information is not readily available we recommend that a site analysis and load test report is completed.

The information recorded on this report will create an accurate picture of the site's condition and the exact capabilities of the anchor system. It will also identify other important considerations such as accessibility and installation times.

## TECHNICAL GUIDANCE & SUPPORT



With over 40 years' experience and thousands of successful projects worldwide Platipus offers pre-contract site evaluation and anchor testing together with on-site training and support. In addition, we're able to provide real time technical guidance at all stages of the design and installation process allowing for greater engineering confidence.

A no fee Conceptual Proposal outlining possible anchoring solutions suitable for your project can be provided. We can also connect you with a local qualified engineer who is familiar with Platipus anchor systems.

## APPROVED INSTALLERS



We have an excellent relationship with a network of Platipus® trained 'Approved Installers' throughout the USA. We work with these companies to provide our clients with a complete design, supply and installation service.

We can introduce you to the most suitable 'Approved Installer' who will be pleased to provide you with a competitive quotation for installation.

## ON-SITE INSTRUCTION & SUPERVISION



We place great emphasis on customer training and product support. To achieve this, we offer a range of comprehensive training programmes for all clients.


To satisfy individual requirements and for your convenience, we can also offer tailor made training and full product demonstrations on-site.






# INSTALLATION EQUIPMENT


## Light Installation

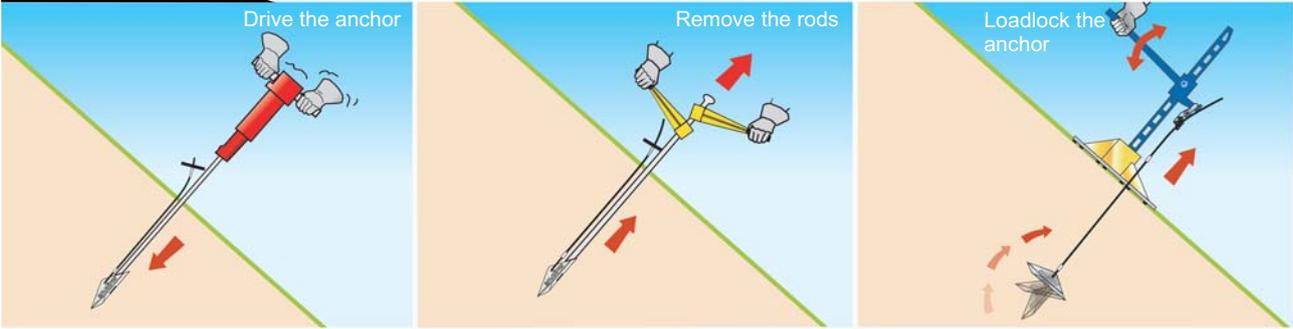

## Medium Installation

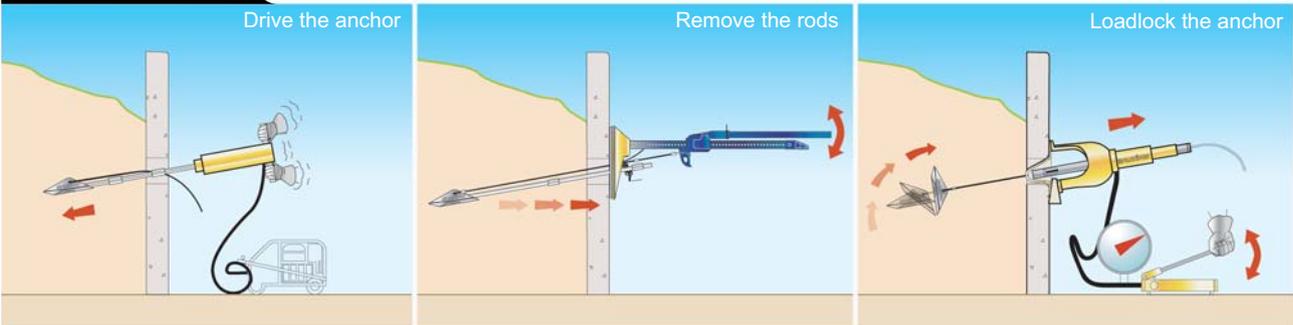

## Heavy Installation

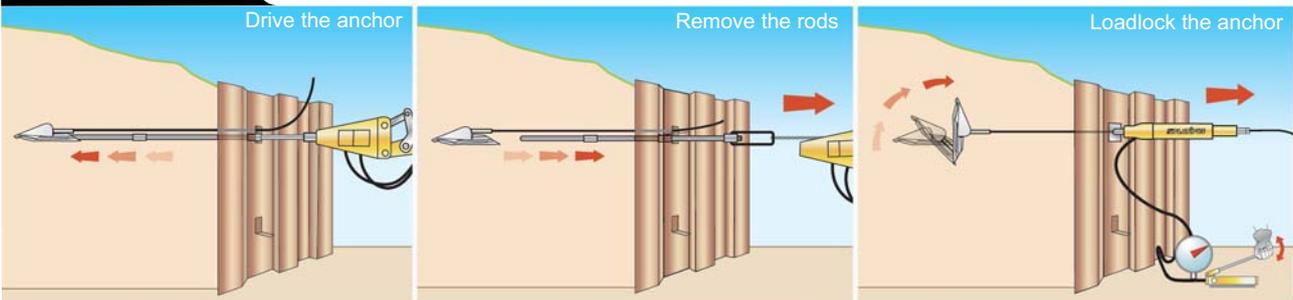

# HIRE EQUIPMENT



Although all installation equipment and tools are available to purchase, we understand that some customers may only require equipment for one-off installations. As a result, we can provide a large choice of hire equipment to install and proof test the complete range of earth anchors.

We purchase all of our equipment and tools from the market's leading manufacturers. Our hand-held hydraulic breakers and power packs deliver the lowest vibration and noise levels available.







# CORE APPLICATIONS

The Platipus® anchor system can be used in many situations. Below are some illustrations of the most common circumstances.




## EROSION CONTROL

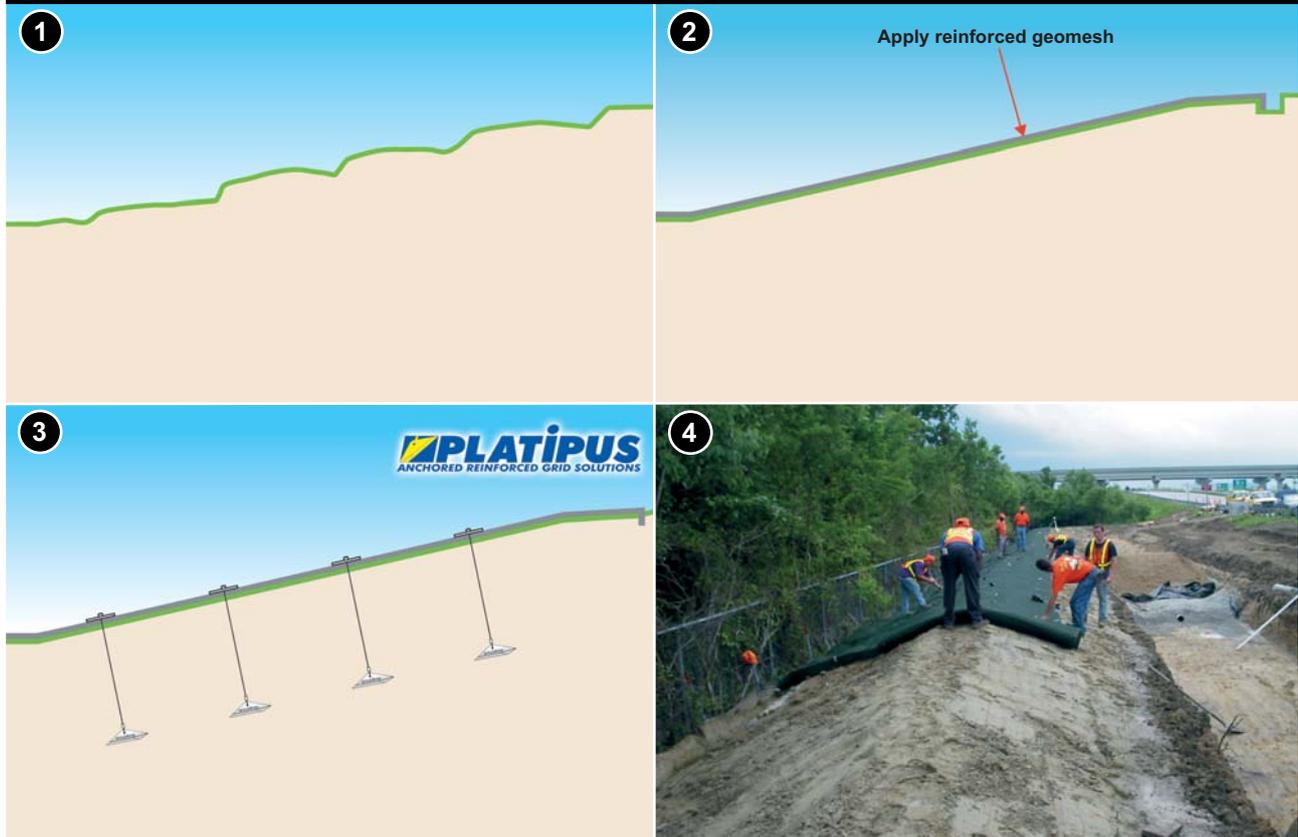




## SHALLOW SLIP FAILURES

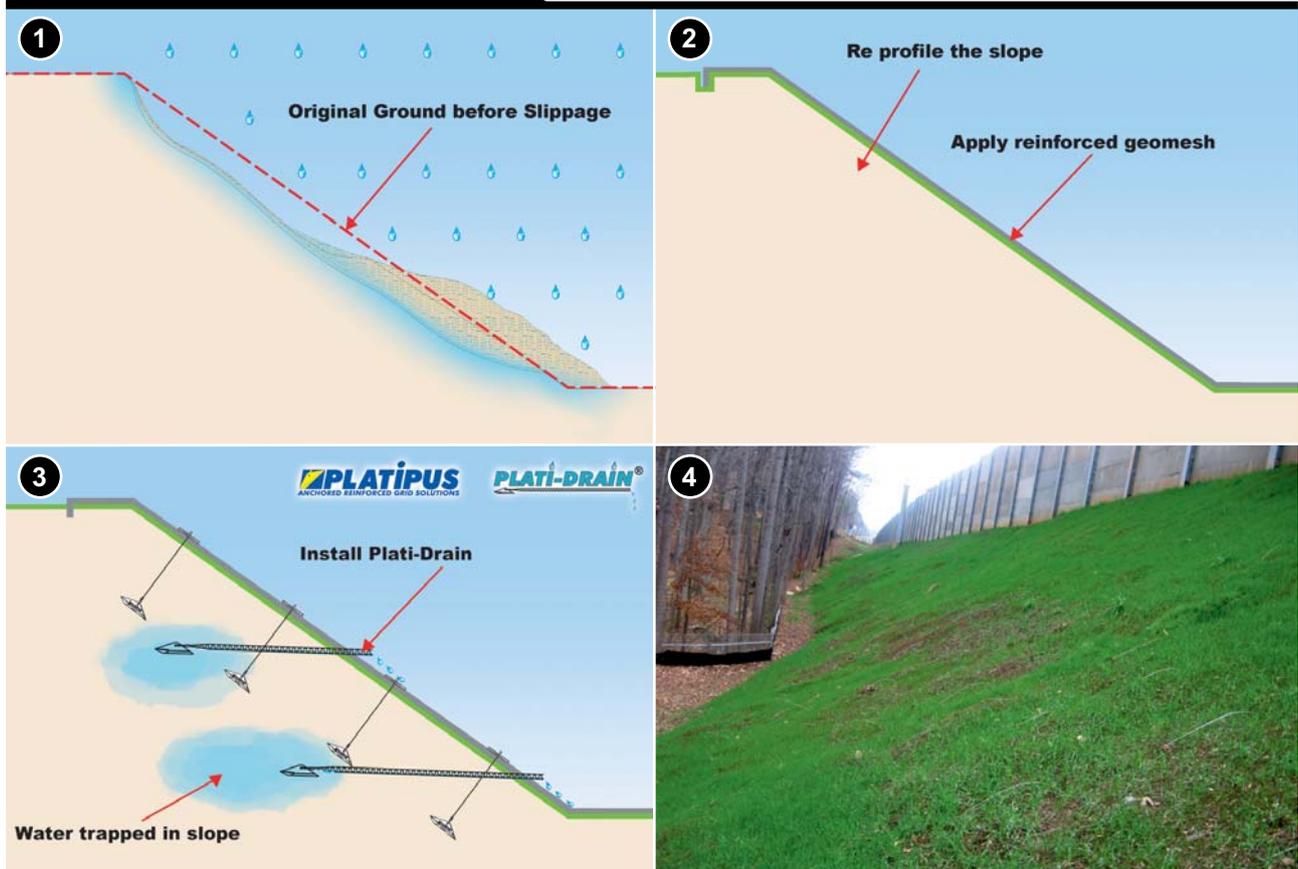


# DEEP SEATED FAILURES

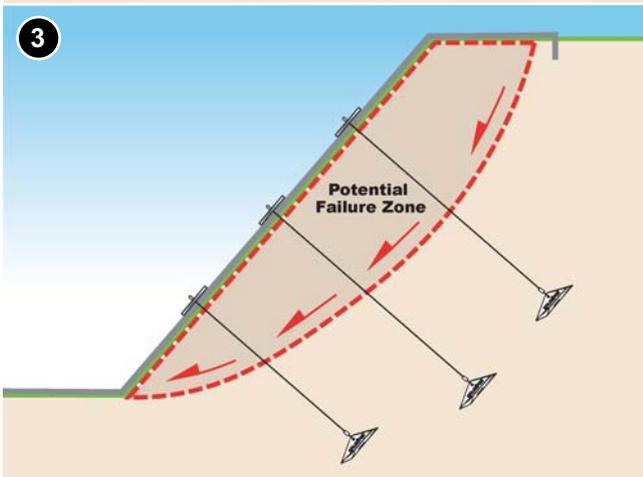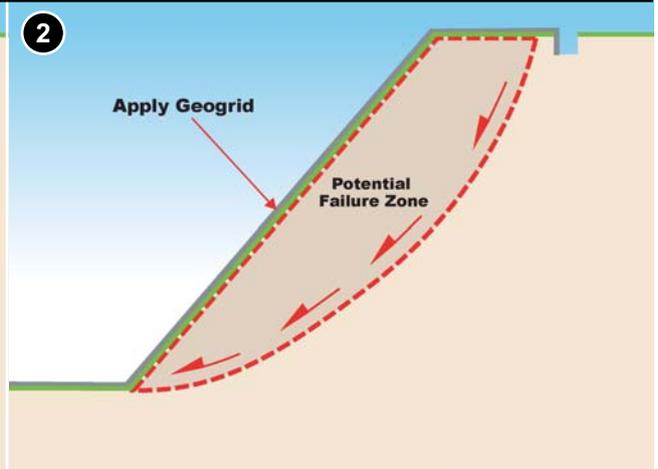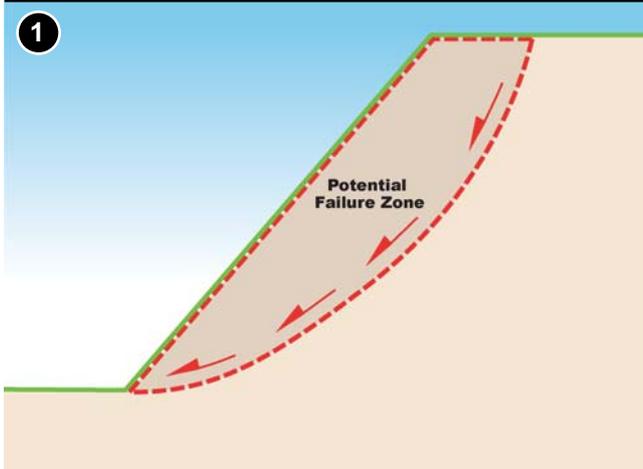

# CUT FACE SLOPES

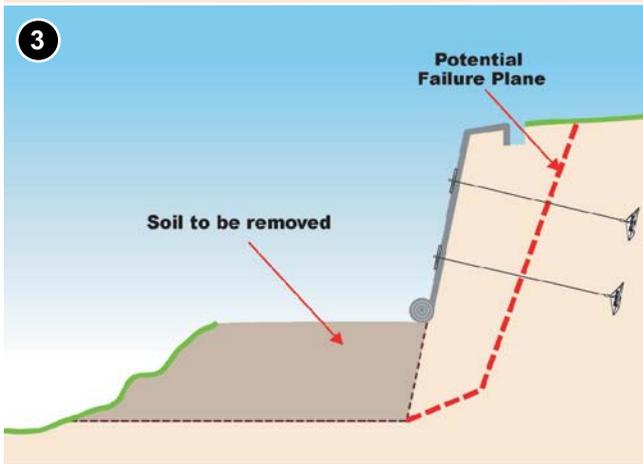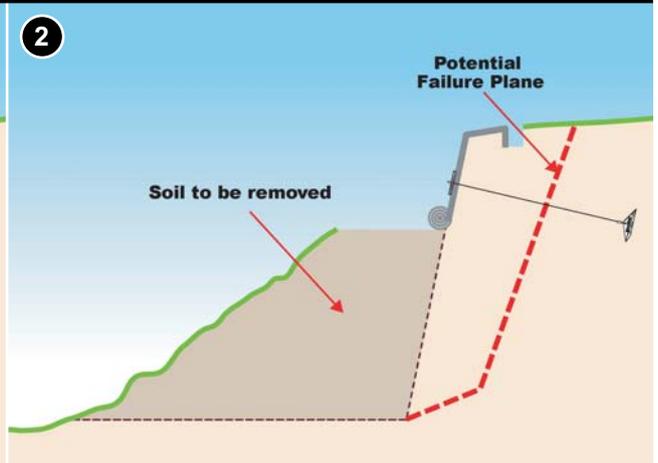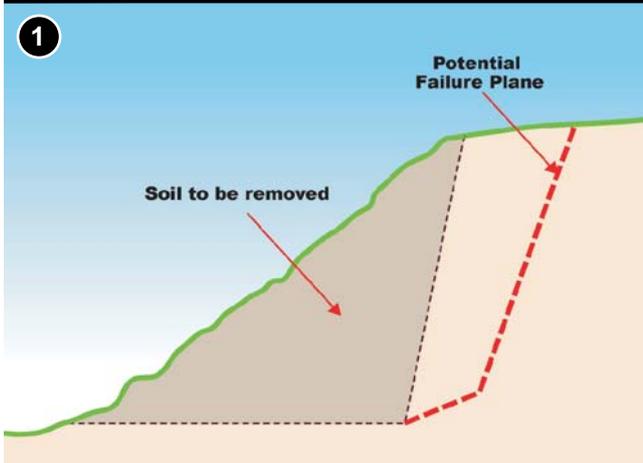

## RETAINING WALL FAILURES

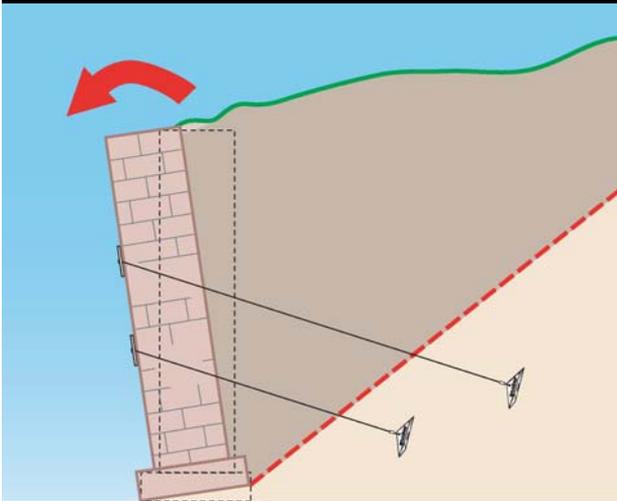

## TYPICAL EXAMPLES

The Platipus® anchor system delivers excellent performance for an increasing range of applications. The following pages show a portfolio of projects we have completed over the last few years and have been divided into specific areas.

## RETAINING WALLS



Timber



Cast in-situ Wall



New Reinforced Walls



Remedial Solution


## SLOPE STABILIZATION



Temporary Support



Permanent Rail

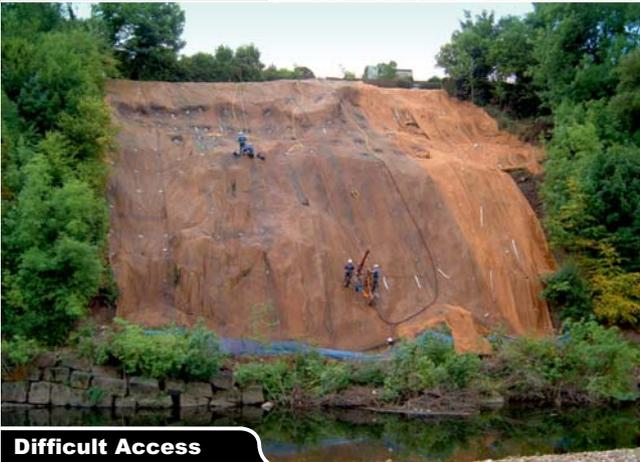

Difficult Access



Deep Excavation


## BRIDGE REPAIR




Bridge Abutments



Spandrel Walls

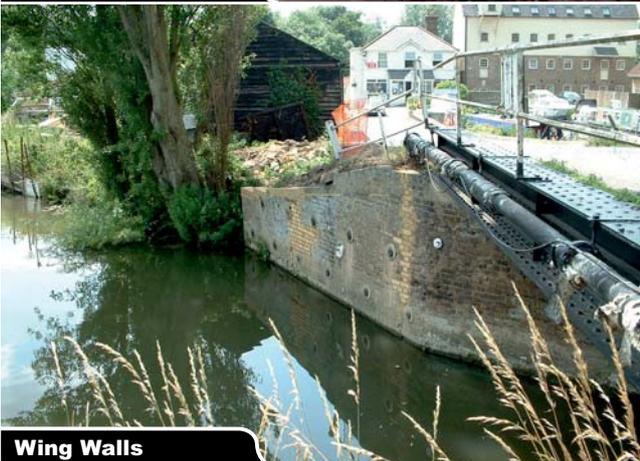

Wing Walls

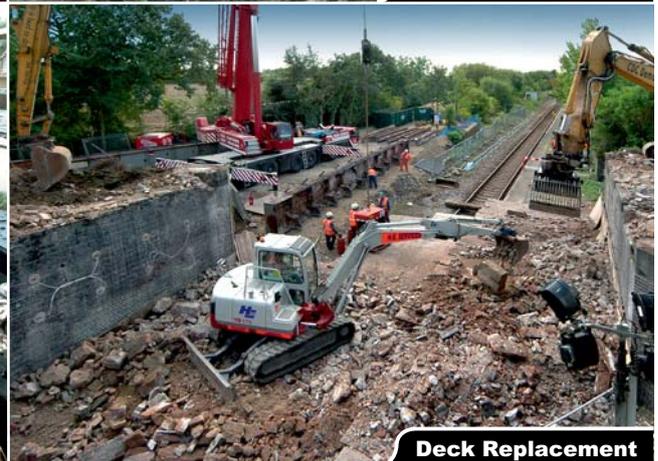

Deck Replacement

## SHEET PILING



Temporary Support



Excavation



Permanent Support



Canal Bank Stabilization

## EROSION CONTROL



Coastal Erosion



Surface Erosion



Scour Protection



Flood Protection

## GABIONS



Additional Support



Rotating




Emergency Support



New Build

## ROCK RETENTION

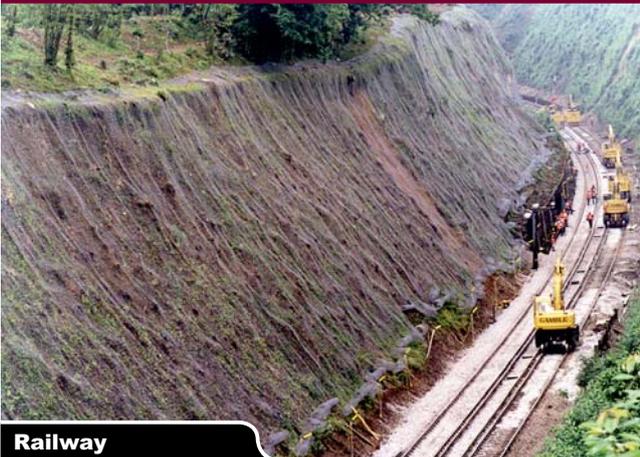

Railway



Difficult Access



Coastal



Highways

## BUOYANCY CONTROL



Pipelines



Storm Water Tanks



Water Cascades



Buoyancy


## DRAINAGE SOLUTIONS



Increase Soil Strength



Increase Slip Plane Friction

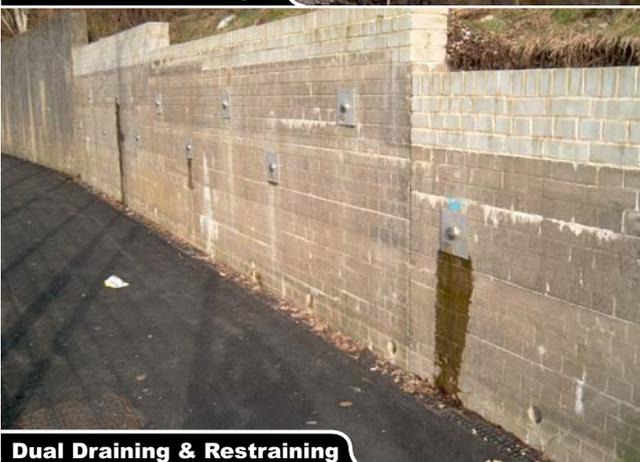


Dual Draining & Restraining



Deep Penetration

## GUYED STRUCTURES

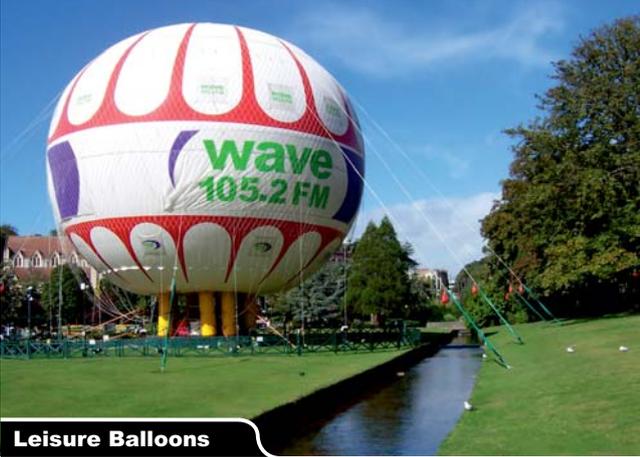

Leisure Balloons



Permanent Structures



Signal Gantries



Temporary Structures

## SCAFFOLDING SECURITY



Temporary Support



Power Line Crossing



Rail



Historical Repair

## FOUNDATIONS



**Mooring Pontoons**



**Fence Posts**



**Handrail**



**Footbridge**

## LANDFILL CAPPING



**Steep Gradients**



**Rapid Installation**



**Aesthetically Pleasing**



**Environmentally Friendly**

# GENERAL SECURITY



**Aircraft**



**Pitch Cover**



**Safety Boom**




**Boat**


# PLUS MANY MORE



**Utility Anchoring**

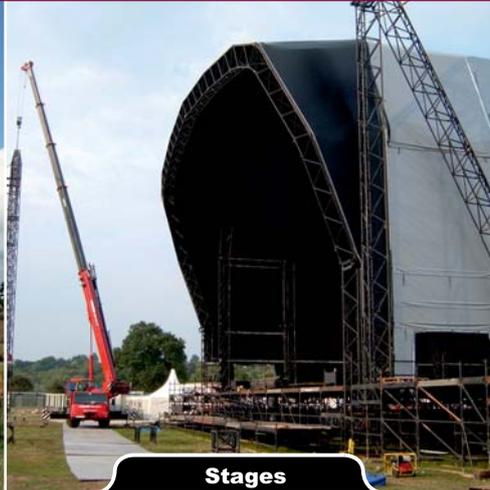


**Stages**

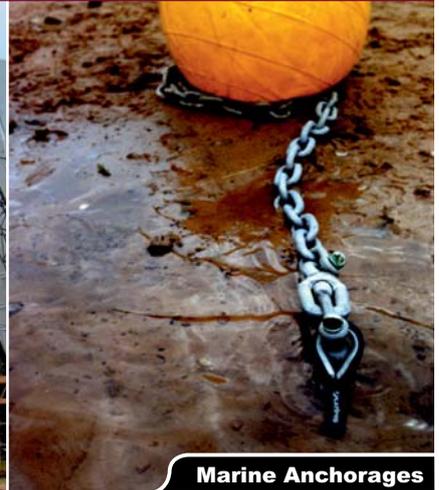

**Marine Anchorages**



**Rope Courses**

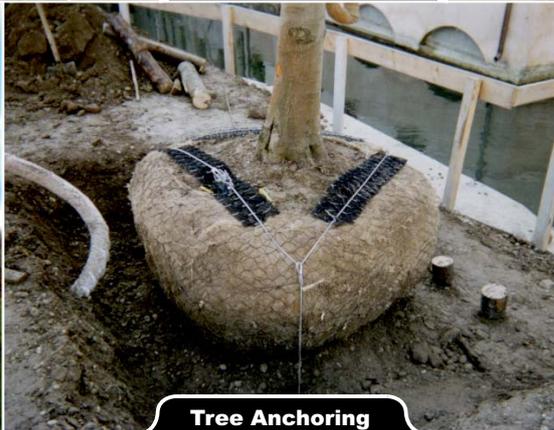


**Tree Anchoring**



**Winch Points**



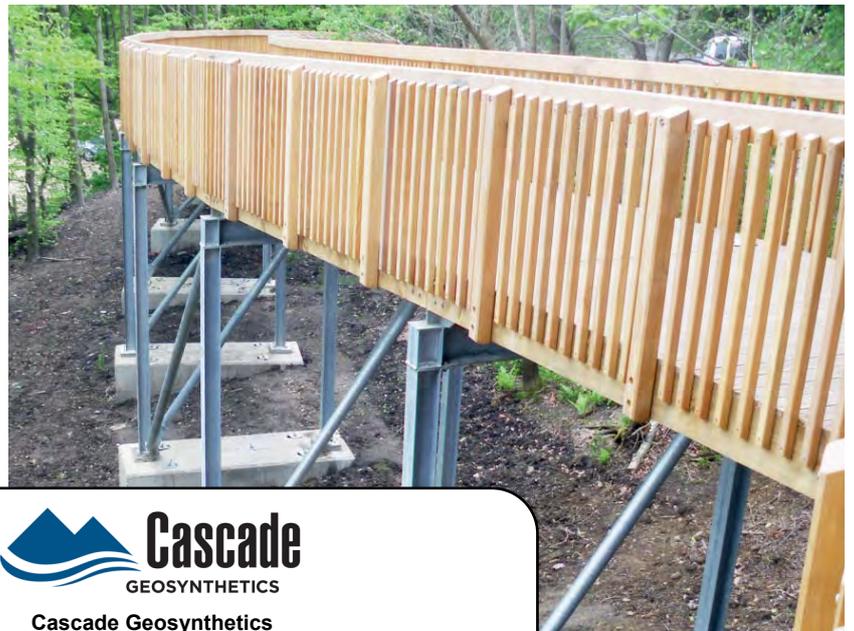

**Cascade Geosynthetics**

Cascade serves the Pacific Northwest including Oregon, Washington, Idaho and Alaska.  
 P: 971-339-1020 | E: salescascade@cascadegeos.com | W: www.cascadegeos.com

PDEA®, ARGS® and ARVS® are Registered Trademarks of Platipus Anchors.

Platipus Anchors technology is protected by International Patents, Trademarks and Registered Copyright.



Platipus Anchors Inc,  
 1902 Garner Station Boulevard,  
 Raleigh, NC 27603, USA.  
**T: (919) 662-0991**  
**E: civils@platipus.us**

Platipus Anchors Limited,  
 Kingsfield Business Centre, Philanthropic Road,  
 REDHILL, Surrey, RH1 4DP, England.  
**T: +44 (0) 1737 762300**  
**E: info@platipus-anchors.com**